



## COMPONENTS

- Quick release lid clips
- Fully sealed lid
- Removable Stainless Steel Outlet Filter

## PRODUCT CODE

GCESEDTRAP

## FEATURES



- Durable Polypropylene Construction
- 200kg Load rated cover
- 104°C Continuous operating Temperature
- Removable Stainless steel outlet filter
- 75.5L/min flow rate
- Connections – 50mm

## RELATED PRODUCTS & ACCESSORIES

- GCE35 Grease Converter
- GCE50 Grease Converter

## TECHNICAL SPECIFICATIONS

GCESEDTRAP	
A	600mm
B	151mm
C	89mm
D	325mm
E	414mm

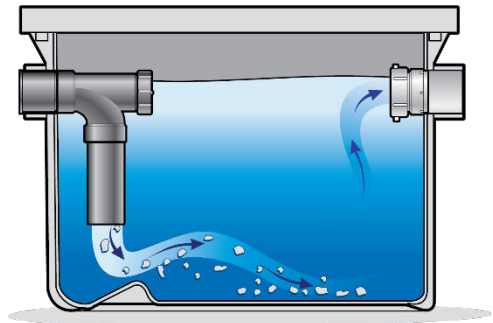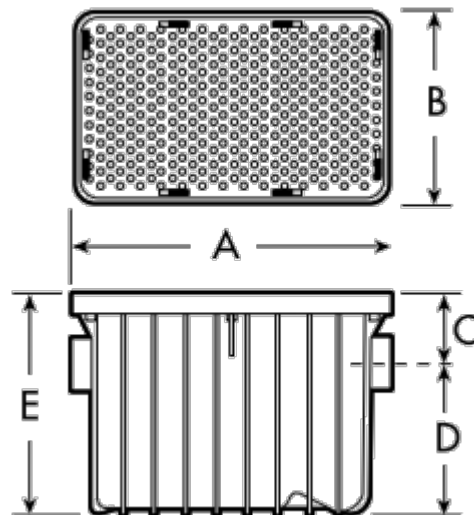

The Endura Sediment Trap can be used to separate by gravity fine material such as plaster, clay, sand, coffee grinds and general debris.

The Endura® Sediment Trap requires periodic servicing to remove accumulated material which will maximise its ongoing effectiveness either by hand or suitable wet vacuum method. Ensure the outlet screen is cleaned and reinserted before re-starting.

All dimensions are in millimetres and subject to normal manufacturing tolerances. Dux reserves the right to vary specifications without notice.