



COMPONENTS

- Quick release lid clips
- Fully sealed lid
- Solids Basket
- Outer tank

PRODUCT CODE

GCESOLINT

FEATURES



- Stand alone Solids Interceptor
- 200kg load rated cover
- 104° Continuous operating temperature
- Connections – 50mm

RELATED PRODUCTS & ACCESSORIES

- GCE35 Grease Converter
- GCE50 Grease Converter

TECHNICAL SPECIFICATIONS

GCESOLINT	
A	368mm
B	441mm
C	89mm
D	325mm
E	414mm

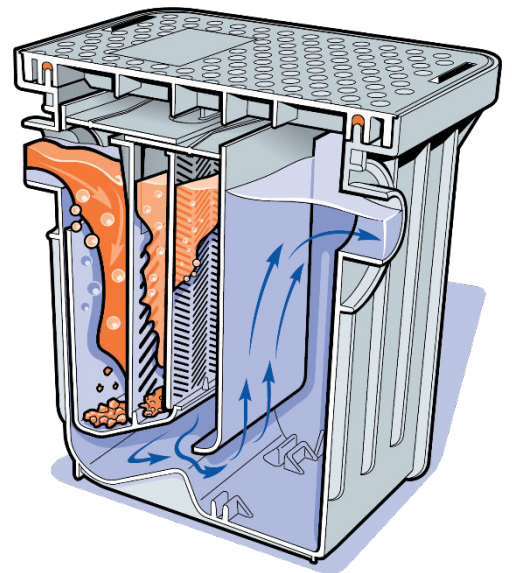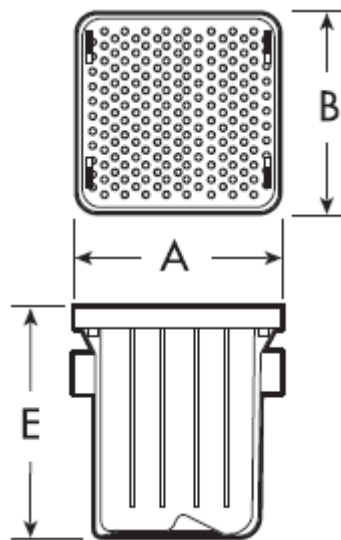

The Endura Solids interceptor should be cleaned and/or checked weekly as solids left in the tank for more than 5 – 7 days will change the pH of the interceptor.

All dimensions are in millimetres and subject to normal manufacturing tolerances. Dux reserves the right to vary specifications without notice.

Endura Solids Basket Accessory Dux Grease Management



COMPONENTS

- Solids Basket
- Fine Screen
- Coarse Screen
- Solids Container
- Handle/Cover

PRODUCT CODE

GCEBASKET

FEATURES



- Compatible with GCE35/50 Endura Grease Converters & GCESOLINT Endura Solids Interceptor
- 104° Continuous working temperature
- Removable/washable screens

RELATED PRODUCTS & ACCESSORIES

- GCE35 Grease Converter
- GCE50 Grease Converter
- GCESOLINT Solids Interceptor

TECHNICAL SPECIFICATIONS

GCEBASKET	
A	184mm
B	352mm
C	76mm
D	289mm
E	365mm

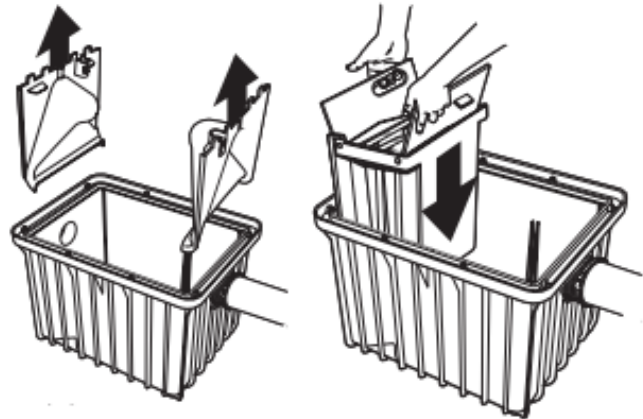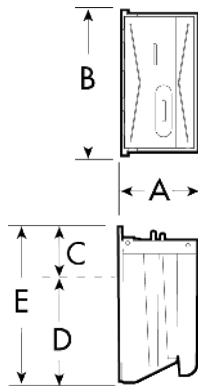

Installation in to an Endura Grease Converter

The Solids Basket Accessory can be fitted directly in to an Endura Grease Converter GCE35 and/or GCE50 in place of the inlet baffle or be located within its own stand alone tank.

- 1. Remove Baffles** – Remove the inlet and outlet baffles by pulling vertically at the lifting locations
- 2. Install Solids Basket** – Insert the Solids Basket accessory into the Inlet baffle location pushing it all the way down until it bottoms out

Note: Sufficient clearance above the interceptor (457mm) must be available and maintained for removal and replacement of the Solids Basket

All dimensions are in millimetres and subject to normal manufacturing tolerances. Dux reserves the right to vary specifications without notice.